

Solenoid Valve V2 for TriBox mini

03A000003




The TriBox Mini supports operation of an external controllable valve for the purpose of compressed air or water cleaning. All settings for the Solenoid Valve V2 can be adjusted by the TriBox Mini menu ("Measurement & Cleaning" subitem „Cleaning“).

The Solenoid Valve V2 can easily be installed. It features four 5.3 mm installation holes.

Available configurations:

- interval cleaning
- duration of cleaning
- pause before measurement

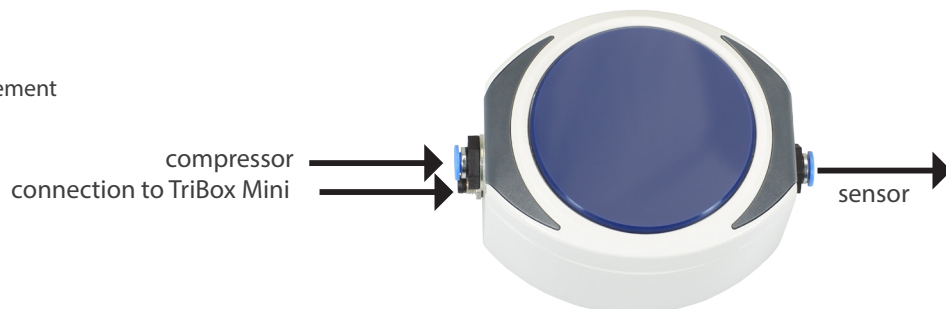

CAUTION

Only Version V2 of the Solenoid Valve (03A000003) is suited for water cleaning. Version V1 (03A000000) only supports pressured air cleaning and should not get in touch with water.

Technical Specifications

Size	110 x 97 x 55 mm	~ 4.3" x 3.8" x 2.2"
Weight	~ 0,6 kg	~ 1.3 lbs
Max. Pressure	5 bar	~ 73 psig
Voltage supply	12 VDC	
Power consumption	3 W	
Connection	for 6 mm hoses (4 mm inner diameter)	
Housing	die-cast aluminium alloy	
Protection type	IP65	NEMA 4X
Cable	1,5 m Anschlusskabel mit M8 Steckverbinder	~ 4' 9" connection cable with M8 connector
Temperature Range	2...+40 °C	~ +36 °F to +104 °F