



VentilBox V2

03A000003




VentilBox V2 for TriBox mini

The TriBox mini supports the operation of an externally controllable valve for the purpose of water or compressed-air cleaning. All settings of the VentilBox V2 can be configured via the TriBox mini menu ("Measurement & Cleaning", sub-item "Cleaning"). The VentilBox V2 is easy to install. It has four 5.3 mm mounting holes.

Available configurations:

- Cleaning interval
- Duration of cleaning
- Pause before measurement

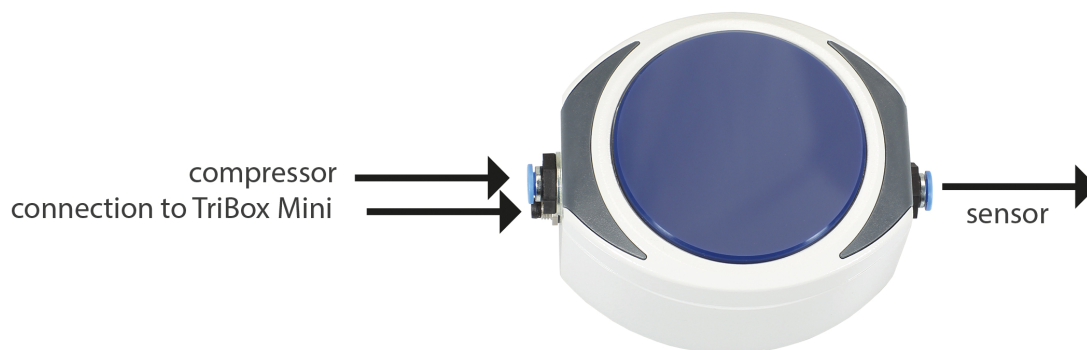

⚠ CAUTION

Only version V2 of the valve box (03A000003) is suitable for water flushing. Version V1 (03A000000) only supports compressed air flushing and should not come into contact with water.

VentilBox V2

Technical specifications

VentilBox V2

Dimensions	110 x 97 x 55 mm	~ 4.3 " x 3.8 " x 2.2 "
Weight	~ 0.6 kg	~ 1.3 lbs
Max. Max. pressure	5 bar	~ 73 psi
Power supply	12 VDC	
Power consumption	3 W	
Connection	for 6 mm hoses (4 mm inner diameter)	
Housing	Die-cast aluminum alloy	
Protection class	IP65	NEMA 4X
Cable	1.5 m connection cable with M8 connection	
Temperature	2...+40 °C	~ +36 ...+104 °F