



Dimension Drawing: microFlu V2 SubConn

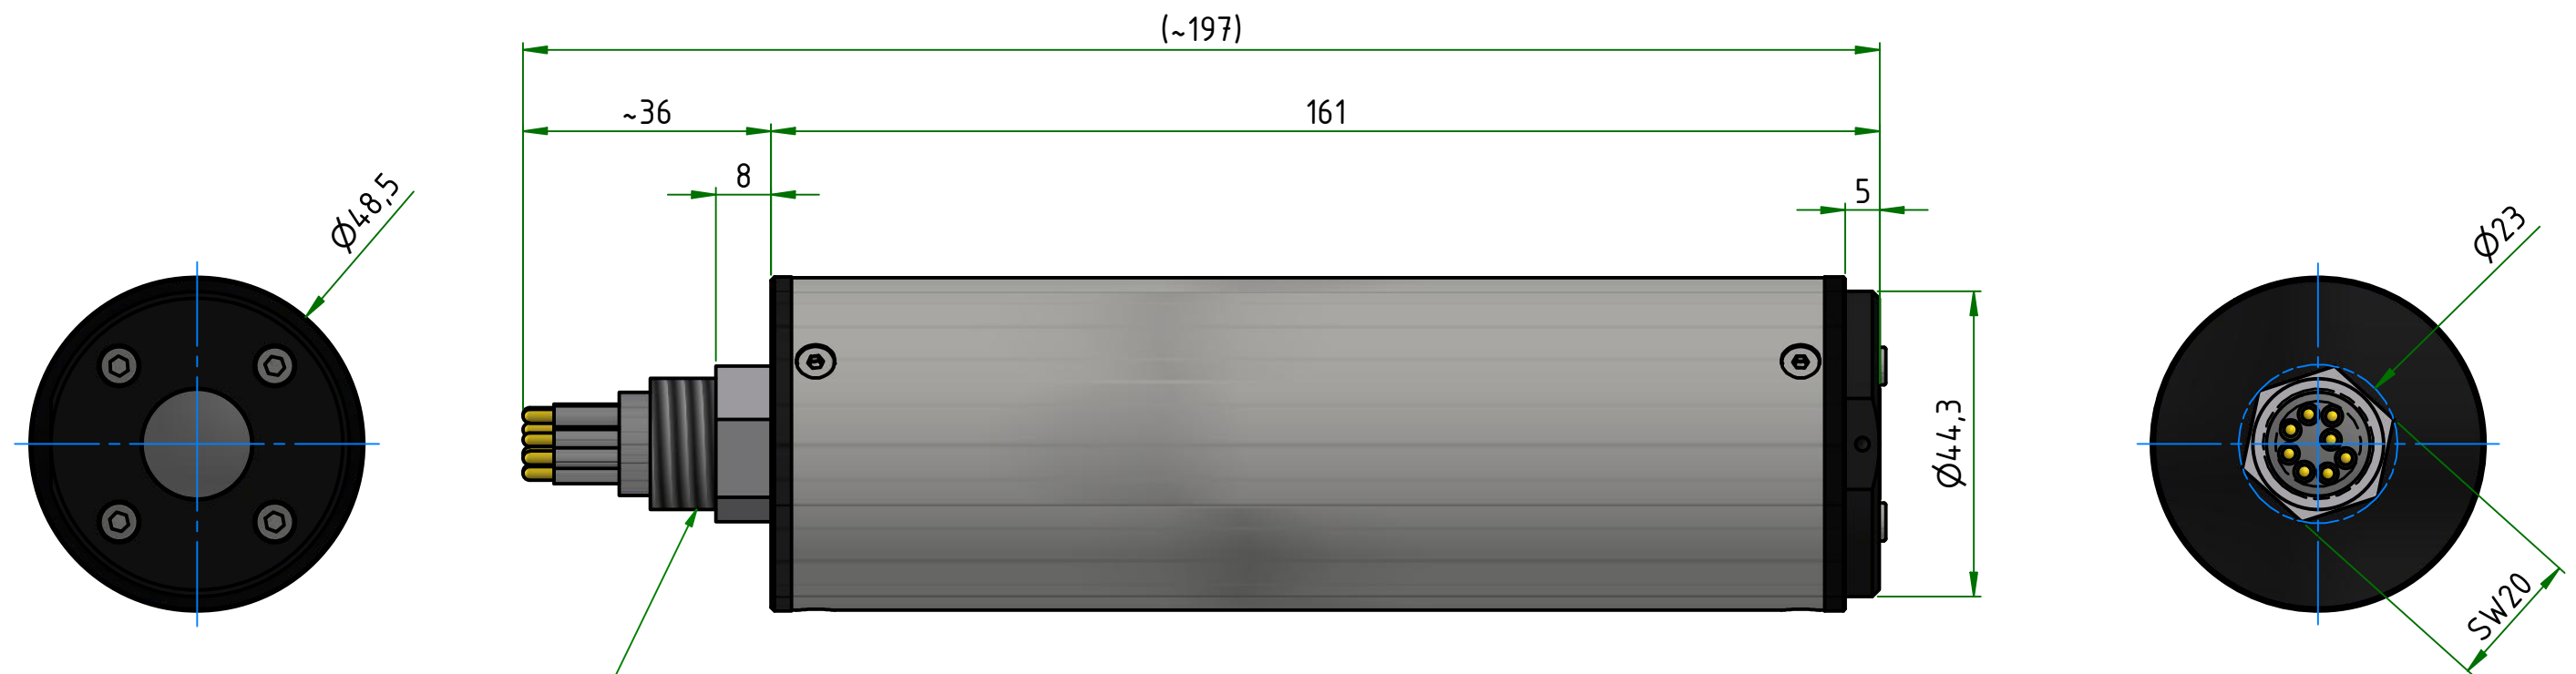

MCBH8MSS or
MCBH8MTi


Position	Material
Sensor Housing	Stainless steel or Titanium
Sealings	Nitrile Butadine Rubber (NBR)
Optics	Glass
Sensor Head	POM-C

Name: microFlu V2 Sub
Date: 21.10.2021 Rev.: MF01A05A
Note: Dimensions in mm, tolerances according to DIN ISO 2768-c,
technical changes are reserved.
Document: D10-026en202202




TriOS Mess- und Datentechnik GmbH • Bgm.-Brötje-Str. 25 • 26180 Rastede • Germany
fon: +49 4402 / 69 67 0 - 0 • fax: - 20 • web: <http://www.trios.de> • e-mail: info@trios.de

Dimension Drawing: microFlu V2 fixed cable

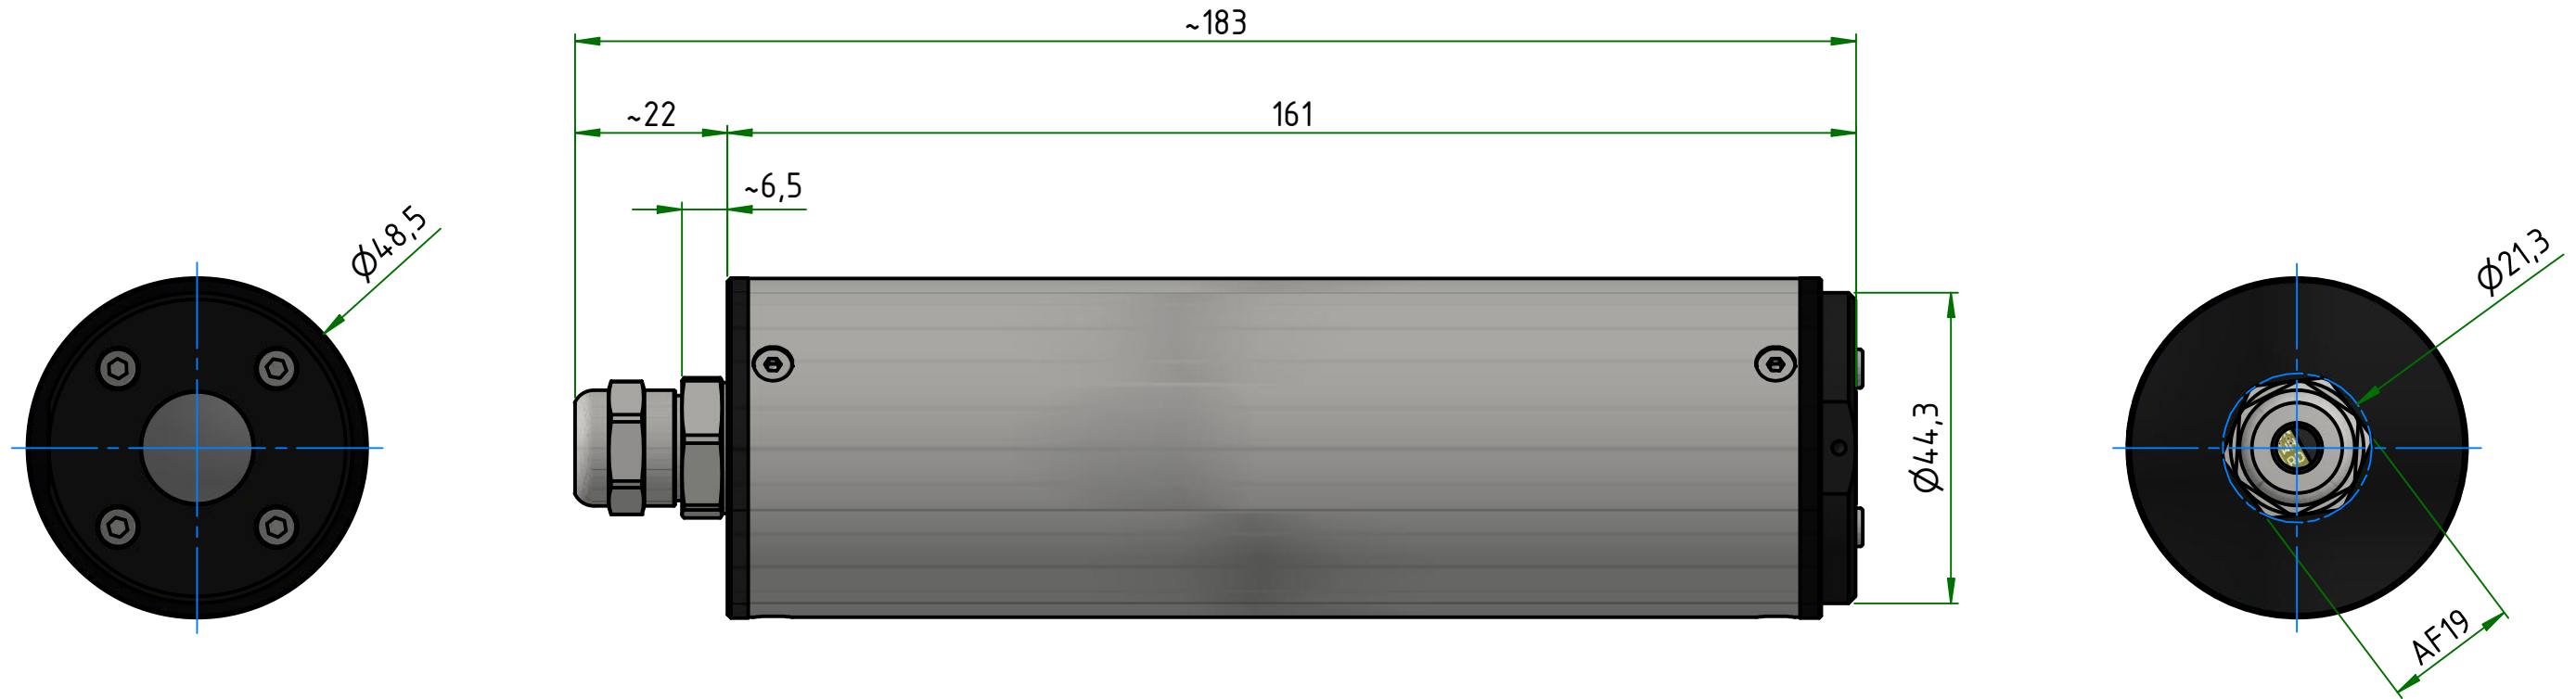

Position	Material
Sensor Housing	Stainless steel or Titanium
Sealings	Nitrile Butadine Rubber (NBR)
Optics	Glass
Sensor Head	POM-C

Name: microFlu V2 Festleitung
 Date: 21.10.2021 Rev.: MF02A01A
 Note: Dimensions in mm, tolerances according to DIN ISO 2768-c
 technical changes are reserved.
 Document: D10-026en202202



TriOS Mess- und Datentechnik GmbH • Bgm.-Brötje-Str. 25 • 26180 Rastede • Germany
 fon: +49 4402 / 69 67 0 - 0 • fax: - 20 • web: <http://www.trios.de> • e-mail: info@trios.de