



Dimension Drawing: microFlu HC SubConn

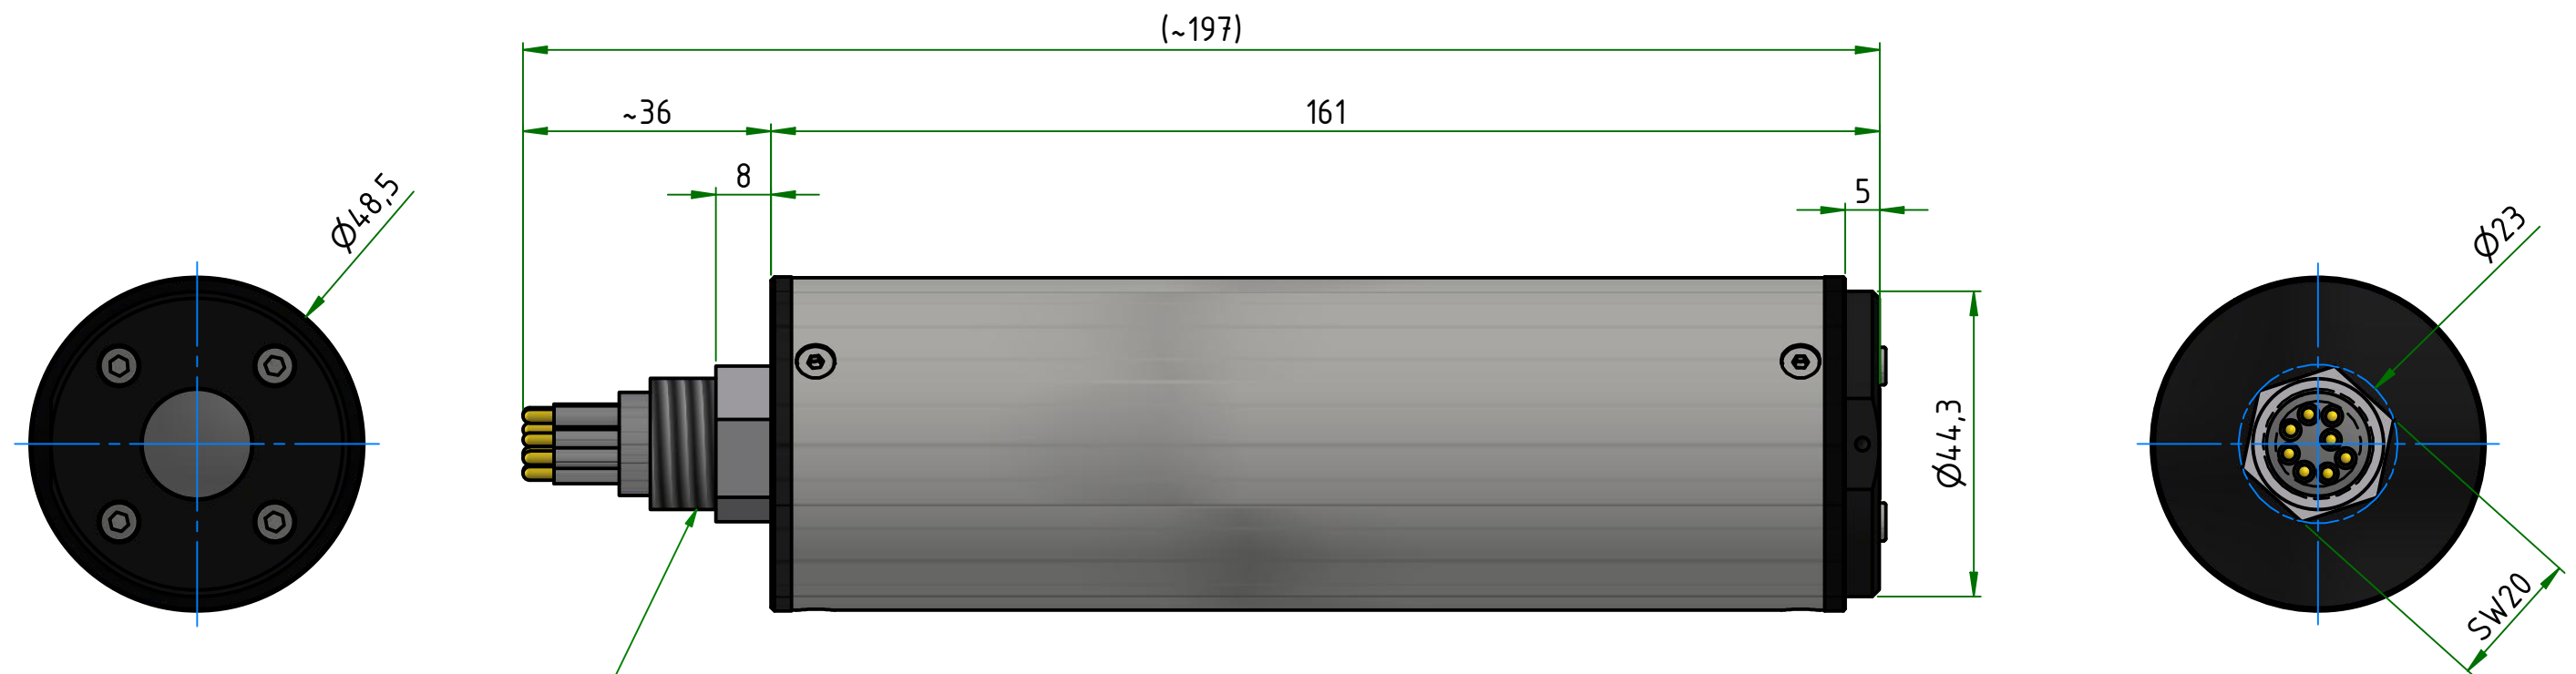


Position	Material
Sensor Housing	Stainless steel or Titanium
Sealings	Nitrile Butadine Rubber (NBR)
Optics	Glass
Sensor Head	POM-C

Name: microFlu HC Sub
 Date: 21.10.2021 Rev.: MF01A05A
 Note: Dimensions in mm, tolerances according to DIN ISO 2768-c,
 technical changes are reserved.
 Document: D10-030en202202




TriOS Mess- und Datentechnik GmbH • Bgm.-Brötje-Str. 25 • 26180 Rastede • Germany
 fon: +49 4402 / 69 67 0 - 0 • fax: - 20 • web: <http://www.trios.de> • e-mail: info@trios.de

Dimension Drawing: microFlu HC fixed cable

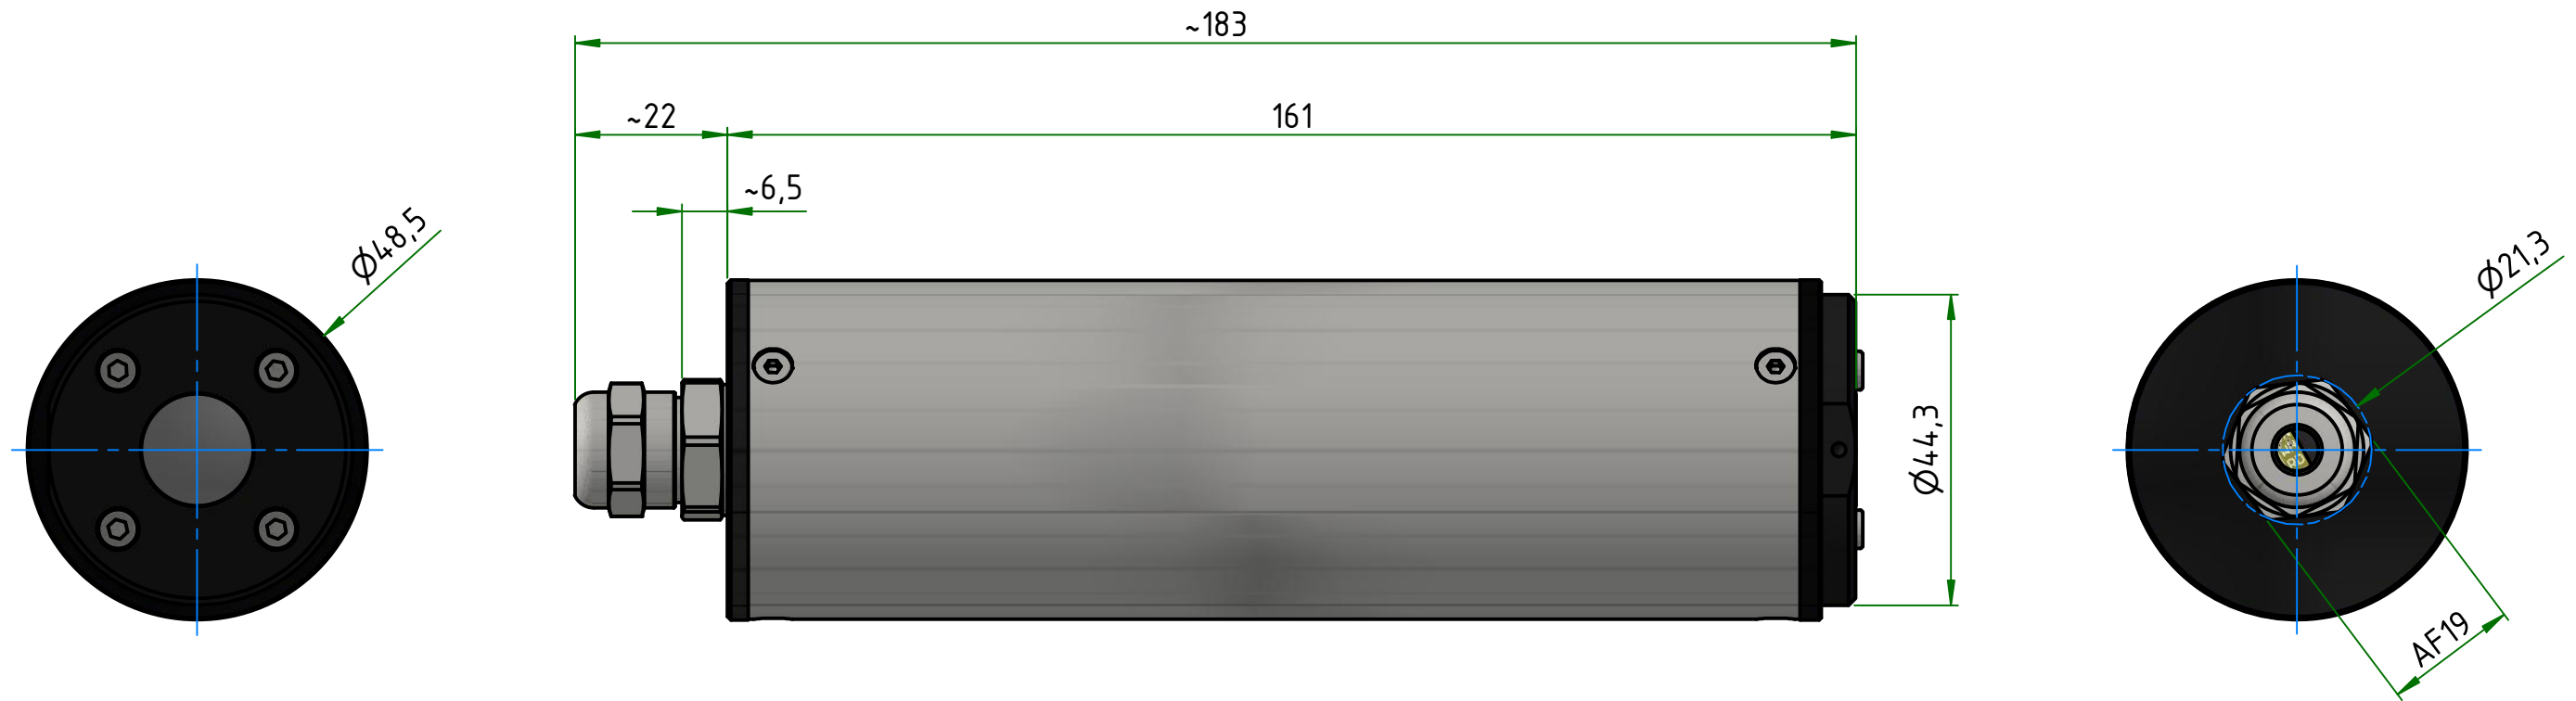

Position	Material
Sensor Housing	Stainless steel or Titanium
Sealtings	Nitrile Butadine Rubber (NBR)
Optics	Glass
Sensor Head	POM-C

Name: microFlu HC Festleitung
 Date: 21.10.2021 Rev.: MF02A01A
 Note: Dimensions in mm, tolerances according to DIN ISO 2768-c
 technical changes are reserved.
 Document: D10-030en202202



TriOS Mess- und Datentechnik GmbH • Bgm.-Brötje-Str. 25 • 26180 Rastede • Germany
 fon: +49 4402 / 69 67 0 - 0 • fax: - 20 • web: <http://www.trios.de> • e-mail: info@trios.de