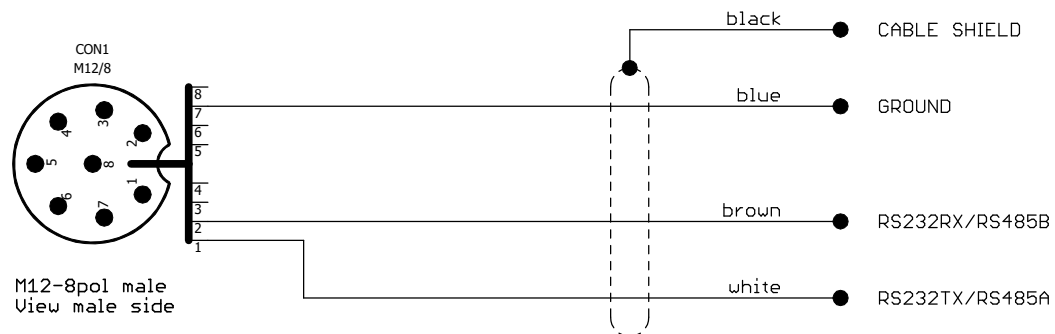


**Note:**

All wire ends have length of 180mm with ferrule.

Note:

The designations for the control and data lines are from device point of view, i.e. RS232RX is the receiving line and RS232TX is the transmission line of the device.

M12-8pol.	Designation	open end
1	RS232TX/RS485A	white
2	RS232RX/RS485B	brown
7	GROUND	blue
Shield	CABLE SHIELD	black

Product table

Document	Used for
D65-051en220502	TriBox3
D65-055en220502	TriBox mini

Part number	Configuration
50A034100	PUR M12-OpenEnd/2m
50A034301	PUR M12-OpenEnd/10m

Comments:

Date	Name	Project:
02.05.2022	G.Buss	Wiring diagram
Rev.		Title:
		PUR M12-OpenEnd D TriBox Serial Interface
 TriOS Option Sensors Bürgermeister-Brötje-Str. 25 26180 Rastede, Germany		Document: see product table
		Repl. for:
		Repl. by:
		Var.:
		Sheet:
		1/1